



AURES 640

Integrated Touchscreen Computer



Dual screen system




Powerful – Feature Rich – Reliable

The **AURES 640** is an updated version of the very successful 625. The hardware shows the same design as the latter with updated electronics. The **AURES 640** uses the Intel Baytrail J1900 2.0GHz quad core processor which runs 2½ times faster than the dual core D2550 used in the former version. In addition, the J1900 processor supports Windows 7, POSReady 7, Windows 8.1, Windows 8.1 Industry and Windows 10.

The **AURES 640** also comes in standard with a PCT touch screen, 4GB of main memory, and a 500GB Hard Drive or 32GB SSD.

The AURES 640 is proposed at the same price as the previous version. It offers a VGA port, USB 3.0 port and a total of 5 USB ports. The system also supports a wide range of peripherals including a 10.1 secondary display, line display, MSR, RFID readers, iButton, finger print reader and other peripherals.

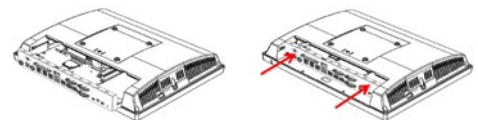

MB module slide in-out, no tools required

A U R E S 6 4 0

AURES 640

- Intel Baytrail J1900 Processor, Fanless
- Projected Capacitive Touch Screen technology (PCT)
- 15 inch 4:3 1024 x 796 LED Backlight LCD
- Highly adjustable viewing angle
- 500GB HDD or 32GB SSD standard
- 4GB memory standard, up to 8GB
- Intergrated Power Supply
- 5 external USB ports, 4 x 2.0, 1 x3.0
- 4 external serial ports with power
- VGA Video port, Optional DisplayPort
- Cash drawer port, 2 drawer support
- Secondary Video display option
- Many peripheral options



MODEL

AURES 640

Processor(s)	Intel Baytrail J1900 2.0GHz Quad core
RAM Memory	4 GB Standard, 8GB Maximum DDR3L 1333 SO-DIMM
HDD & SSD	1 x 2.5 inch slot SATA, quick change 500GB HDD or 32GB SSD standard Optional 2 nd drive mounted on MB

LCD & TOUCH SCREEN

LCD	15 inch TFT LED backlight 300 cd/m ²
Resolution	1024 x 768
Touch Screen	Projected Capacitive Touch (PCT) standard

EXTERNAL I/O PORTS

Serial Ports	4 external ports, +5V/12V power option 3 x RJ45, 1 X DB9
USB	5 total external USB port: 4 x USB 2.0, 1 x USB 3.0
LAN	10/100/1000, internal WLAN option
Cash drawer	1 x RJ 11 (2 drawer support, 12V or 24V)
Audio	Internal speaker
Video	VGA with optional +12V power Optional DisplayPort
Power Input	+19V 4 pin locking connector 65W power adaptor in base

ENVIRONMENT


Temperature	0°C ~ 40°C (32°F ~ 104°F)
Safety / EMI	CE/FCC Class A
IP Rating	IP64 front bezel, IP54 whole unit
Dimensions (W x D x H)	365 x 220 x 310 mm

OPTIONS

MSR*, MSR/RFID, MSR/Fingerprint, MSR/iButton reader
20 x 2 line customer display LCM or VFD
2 nd screen (dual screen system for digital display applications) - 10.1" LCD / 14.1" LCD w/wo touch
Base mounted UPS, 3.5 hour run time

O/S

Compatible O/S	Windows 10, Windows 8.1, Windows 7 Pro, POSready 7, Linux
----------------	-----------------------------------------------------------



Zero edge bezel



14.1 inch 16:9
LCD customer display



Extensive I/O ports



Slide in / out mother board

Specifications are subject to change without notice - © AURES 2016

*encrypted version available

www.aures.com

MANUFACTURER OF REMARKABLY
DIFFERENT EPOS TERMINALS

AURES